

CNZ SERIES HYDRAULIC TORQUE TOOL

The CNZ hex drive torque wrench series, your ultimate allies in conquering the most challenging, space-restricted bolting tasks. Our sleek, compact design delivers unmatched accessibility, slipping into tight spaces where other tools simply can't reach. No more contorting yourself or compromising accuracy.

Just like the CNX series, the CNZ features a convenient release lever, simplifying tool disengagement and saving you time and effort. The secondary pawl accelerates tightening cycles while standing firm against unwanted rollback, ensuring efficient and reliable bolting. From delicate 329 Nm tasks to heavy-duty 41986 Nm applications, the CNZ series offers a diverse range of models to perfectly match your needs. Find the perfect fit for your toughest jobs.



Secondary Pawl for Faster Tightening

Tighten bolts with blazing speed thanks to the secondary pawl that accelerates tightening cycles while simultaneously preventing unwanted rollback, ensuring both efficiency and reliability.

360° x 360° Hose Uniswivel

Experience unmatched maneuverability with the 360° x 360° hose uniswivel, granting you the freedom to reach any angle without compromising control.

Ratchet Freeing Mechanism

Enjoy smooth and precise bolt loosening with the integrated ratchet freeing mechanism.


Multipurpose Accessories

Enhance your versatility with a range of multipurpose accessories (not included) that cater to your specific bolting needs.

TORQUE RANGE **329-30967 FT.LBS.**

243-41986 NM

TORQUE TOOLS

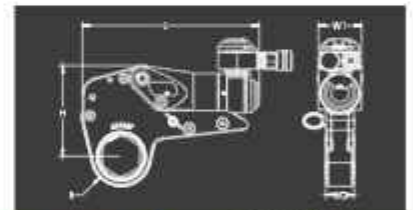

MODEL	H (inch/ mm)	W1 (inch/ mm)	W2 (inch/ mm)	L (inch/ mm)	R (inch/ mm)	HEX (inch/mm)	WEIGHT (lbs/kg) (Without Link)	TORQUE (ftLbs./Nm)	
								MIN.	MAX.
CNZ-02	4.0" 102.1	1.9" 49.3	1.3" 31.8	7.7" 194.6	1.1" - 1.8" 26 - 44.7	3/4" - 2 3/8" 19 - 60	1.98 0.9	243 329	1686 2286
CNZ-05	5.4" 136.4	2.6" 65.8	1.7" 42.4	10.5" 266	1.3" - 2.3" 34 - 58.9	1 5/16" - 3 1/8" 34 - 80	4.41 2	580 786	3853 5224
CNZ-10	6.7" 170.3	3.2" 82	2.1" 53.9	12.6" 320.1	1.8" - 2.9" 45 - 73.4	1 5/8" - 4 1/8" 41 - 100	7.50 3.4	1142 1549	8146 11045
CNZ-18	8.0" 204	3.9" 98.4	2.5" 63.6	14.6" 371.3	2.4" - 3.5" 59 - 88.1	2" - 4 1/2" 50 - 120	12.13 5.5	2009 2724	13392 18157
CNZ-25	9.1" 231	4.4" 111	2.8" 72	14.3" 364	2.6" - 3.9" 67 - 98.3	2" - 4 1/2" 75 - 120	14.85 6.7	2790 3780	19100 25881
CNZ-42	10.7" 272.5	5.2" 131.5	3.3" 84.5	16.8" 427.2	3.1" - 4.8" 78 - 121.9	3 1/2" - 6 1/2" 90 - 165	24.03 10.9	4577 6205	30967 41986

*Minimum and maximum torque output data may vary.